



ULTRALINE

ULTRALINE WINCHMATE BEXCORD


GENERAL

- Circular braided design ropes
- Crosslay 6+1 cores of high tenacity BEX-yarn with a protective cover braid of composite yarn
- Firm construction, ideal for use on winches
- Floating, low density
- Very good abrasion resistance
- High-strength alternative for polypropylene

FEATURES

- **Materials:** High tenacity BEX-yarn
- **Construction:** 6 + 1 cross-lay core with a protective cover of composite yarn
- **Treatment:** On request
- **Color of Rope:** White
- **Approx. Spec. Density:** 0,91 floating
- **Melting Point:** 165°C
- **Abrasion Resistance:** Good
- **U.V. Resistance:** Excellent, due to jacket
- **Temperature Resistance:** 70°C max continuous
- **Chemical Resistance:** Good, solvent and strong oxidizers may have a mild effect
- **Dry & Wet Conditions:** Wet strength equals dry strength

ULTRALINE WINCHMATE BEXCORD					
Dia	Circ.	Dia	Min. Break Load		Weight
mm	“	“	tf	kN	kg/100m
32	4	1 ⁵ / ₁₆	20.5	201	52.6
36	4 1/2	1 1/2	26.5	260	66.4
40	5	1 ⁵ / ₈	30.7	302	81
44	5 1/2	1 ³ / ₄	38.5	378	98.1
48	6	2	47.2	463	117
52	6 1/2	2 ¹ / ₈	54.3	533	132
56	7	2 ¹ / ₄	64.5	633	154
60	7 1/2	2 1/2	75.7	742	177
64	8	2 ⁵ / ₈	82.7	812	200
68	8 1/2	2 ³ / ₄	95.3	935	226
72	9	3	107	1051	254
76	9 1/2	3 ¹ / ₈	118	1154	288
80	10	3 ¹ / ₄	132	1298	319
88	11	3 ⁵ / ₈	162	1593	386
96	12	4	185	1813	456

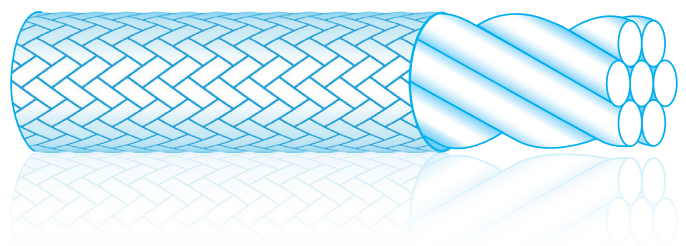



CONTACT



BEXCO NV
Industriepark Zwaarveld 25
9220 Hamme
Belgium
Tel: + 32 52 499 370
E-mail: sales@bexco.be
For more information on our products:
www.bexco.be

BEXCO
OUR ROPE, YOUR SOLUTION