



# ULTRALINE

## ULTRALINE WITH DYNEEMA® FIBER


### GENERAL

- Circular braided design ropes
- HMPE cores with a protective cover braid of composite yarn
- Excellent abrasion resistance
- Longer life time and compact rope
- Minimal elongation
- Firm construction and torque balanced

### FEATURES

- **Materials:** Ultra HMPE (Ultra High Modulus Polyethylene – Dyneema® fiber SK78)
- **Construction:** Load-bearing cores with a cover of composite yarn
- **Treatment:** On request
- **Color of rope:** White
- **Approx. Spec. Density:** 0,975 floating
- **Melting Point:** 145°C
- **Abrasion Resistance:** Excellent
- **U.V. Resistance:** Excellent, due to jacket
- **Temperature Resistance:** 70°C max continuous
- **Chemical Resistance:** Excellent
- **Dry & Wet Conditions:** Wet strength equals dry strength

ULTRALINE WITH DYNEEMA® FIBER (8 & 12 strand)					
Dia mm	Circ. "	Dia "	Min. Break Load		Weight kg/100m
			tf	kN	
36	4 1/2	1 1/2	99	972	82
40	5	1 5/8	113	1112	92
44	5 1/2	1 3/4	143	1401	114
48	6	2	163	1606	131
52	6 1/2	2 1/8	197	1940	146
56	7	2 1/4	224	2204	170
60	7 1/2	2 1/2	257	2528	206
64	8	2 5/8	283	2785	235
68	8 1/2	2 3/4	322	3165	267
72	9	3	361	3541	298
76	9 1/2	3 1/8	398	3911	309
80	10	3 1/4	437	4283	375
88	11	3 5/8	528	5177	424
96	12	4	597	5861	531

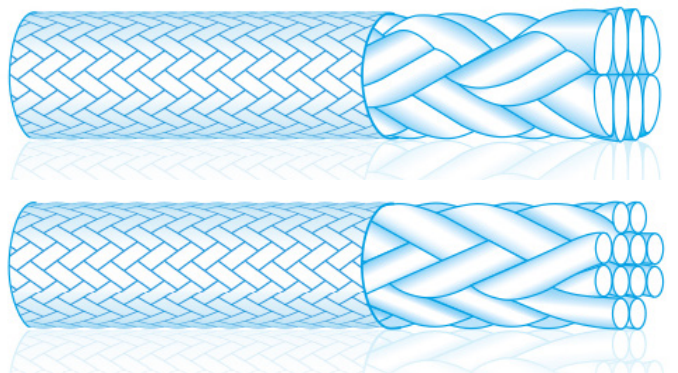

*This rope is also available in a 3-strand parallel core construction. For more information, please visit our website.*



## CONTACT



BEXCO NV  
Industriepark Zwaarveld 25  
9220 Hamme  
Belgium  
Tel: + 32 52 499 370  
E-mail: [sales@bexco.be](mailto:sales@bexco.be)  
For more information on our products:  
[www.bexco.be](http://www.bexco.be)

**BEXCO**  
OUR ROPE, YOUR SOLUTION